

D款, 反向10.0后两脚, DIP-*6.20





MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:


- 1.HOUSING: SEE NOTES, UL94V-0 .
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION:

- 1.ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
- 2.MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF)/MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N 5000 CYCLES MIN
- 3.ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55°C+85°C
- 4.Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"

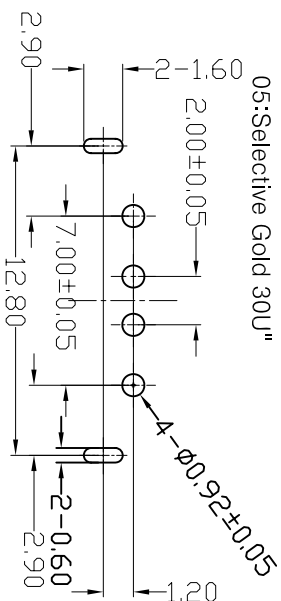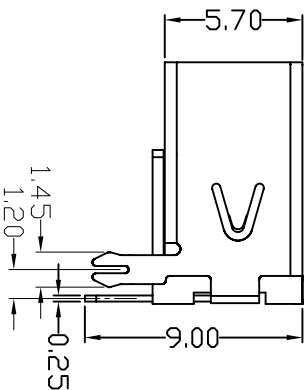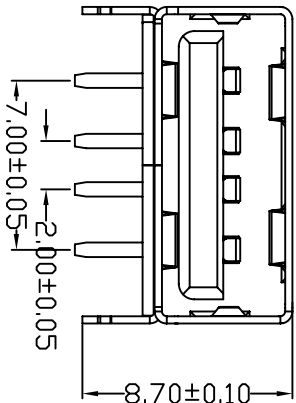

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

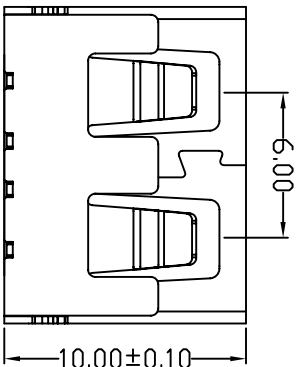

产品图

深圳市精拓金电子有限公司

PRODUCT CHART DWG

公差一覽表

TOLERANCE UNLESS OTHERWISE	公差
X	±0.15
X	±0.10
XX	±0.05
XXX	±0.03
	±5°
	±2°
	±1°
	±0.5°

单位	MM	制图	Z-Y-B	制图料号	JTJ-1USB-10.0-002
UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO	JTJ-1USB-10.0-002
比例	1:1	审核		产品名称	USB A/F 10.0无边后两脚鱼叉(方弹)
日期	20120924	核准		PRODUCT NO	
DATE	20120924	APPR		角法	VER
				版本	AD