
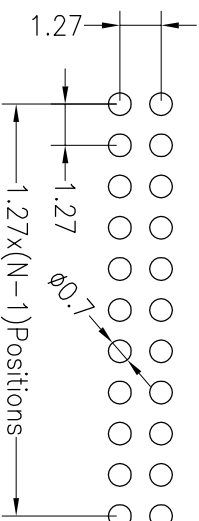




# RoHS

## SPECIFICATIONS

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c  
 Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

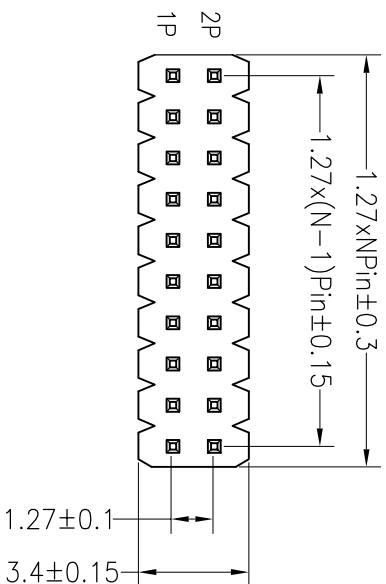

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

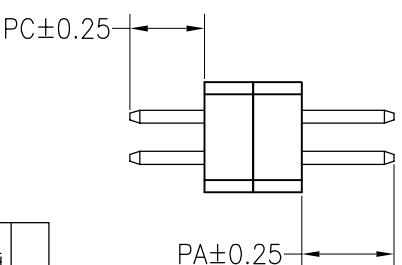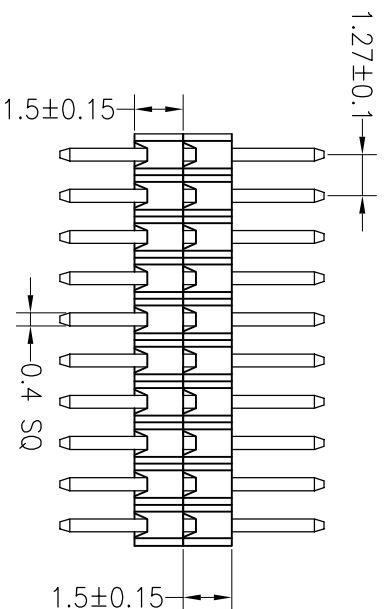

Dimension antitheses list			
ITEM	PA	PC	L
Alternate	4.00	2.50	9.50

深圳市连盛精密连接器有限公司

OPERATION	DRAW	SCALE	FIT
X.X		UNIT	mm
X.XX	CHECK	SIZE	A4
X.XXX		SHEET	1/1
Angle	APPROVE	PROJ.	
±3°			
±0.10			
±0.20			
±0.30			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PART NO.	TITLE:
A0	2012.04.19	NEW DRAWING				PH-00555 ---C0007	1.27P4 2x5Pin 2H=2X1.5mm
1							