


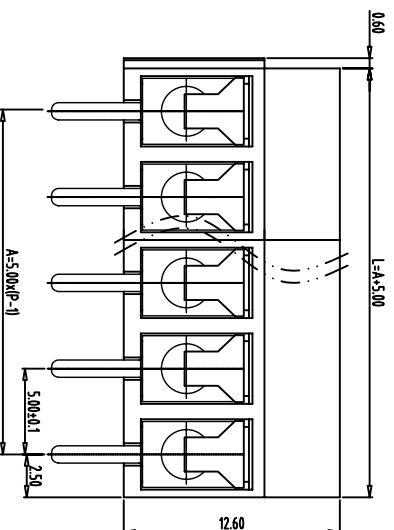
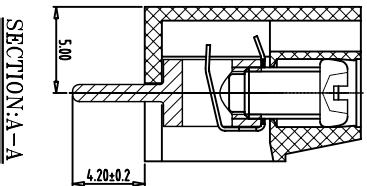



REVISIONS			DATE	APPROVED
ZONE	REV	DESCRIPTION		

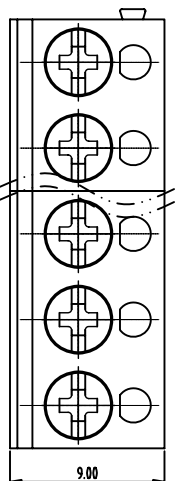

- NOTES:
1. Rating: 300V 10A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C/+105°C
 5. Screw Torque Value: 0.5N.m
 6. Suitable Electric Wire: 14-22AWG

Total Pitch Tolerances										Nominal dimension range													
over	0	30	53	70	90	115	150	250	350	over	0	30	53	70	90	115	150	200	250	over	0	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

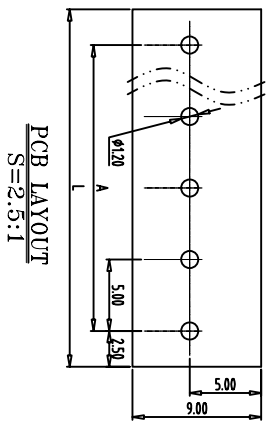

THIRD ANGLE PROJECTION

MX300-5.0-XXP-XC

MAI XU 慈溪市迈旭电子有限公司
Cixi Maixu Electronics Co., Ltd.

SIZE: FSCM NO. DWG NO. REV

DRFT: / / DO NOT SCALE DRAWING SHEET