


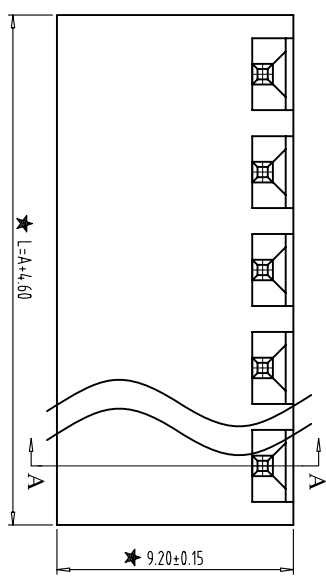



REVISIONS			DATE	APPROVED
ZONE	REV	DESCRIPTION		



SECTION:A-A

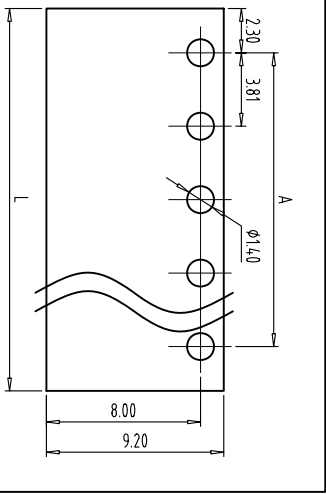


PCB LAYOUT
S=3:1

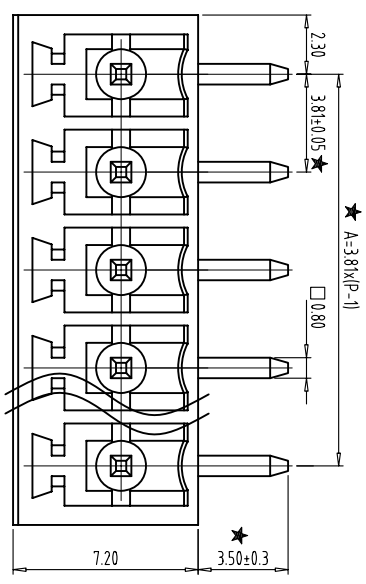

- NOTES:
- 1.Rating:300V 8A ,
 - 2.Insulation Withstands Voltage: AC2000V/MIN
 - 3.Insulation Resistance: 500MΩ or more at DC500V
 - 4.Using Temperature Range: -40°C--+105°C
 - 5." ★ " is the important dimension

Total Pitch Tolerances												Nominal dimension range											
over	0	30	53	70	90	115	150	250	350	500	to	over	0	30	53	70	90	115	150	200	250	320	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5



THIRD ANGLE PROJECTION

MAXU 慈溪市迈旭电子有限公司
Cixi Maixu Electronics Co., Ltd.

MX15EDGR-3.81-XXP-XC

CHKD:	/	SIZE	FSQM NO.	DWG NO.	REV
DRFT:	/	MM (NGH)	DO NOT SCALE DRAWING	SHEET	