


RoHS

MAPX


MODIFICATION

DRW

DATE




6.00

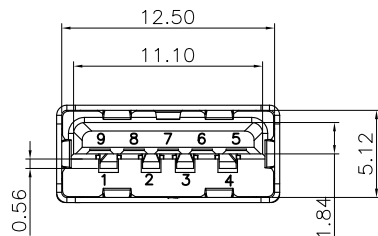

0.56

1.84

5.12

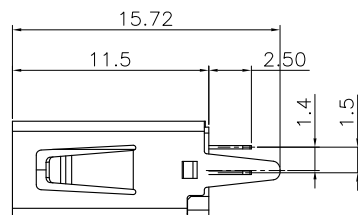


15.72

11.5

2.50

1.4

1.5

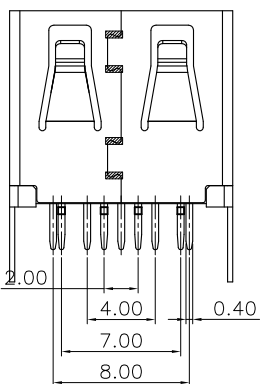


2.00

4.00

0.40

7.00

8.00

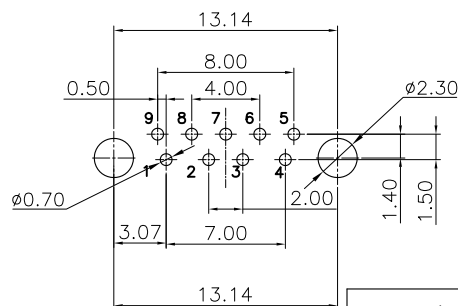

13.14

0.50

8.00

4.00

2.00

7.00

13.14

∅2.30

1.40

1.50

∅0.70

NOTES:

1.MATERIAL:

- 1.1 HOUSING: HIGH TEMPERATURE THERAL PLASTIC.
- 1.2 SPRING CONTACT: COPPER ALLOY.
- 1.3 FLAT CONTACT;COPPER ALLOY
- 1.4 SHELL :COPPER ALLOY.
- 1.5 COVER:HIGH TEMPERATURE THERAL PLASTIC.

2.FINISH:

- 2.1 CONTACT: (SEE P/N.),[50μ"] MIN. NICKEL UNDERPLATING OVER ALL.
- 2.2 SHELL: [50μ"] MIN.SOLDERABLITY NICKEL UNDERPLATING OVER ALL.

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SLGNL NAME	V BUS	D-	D+	GND
REMARK	USB 2.0 CONTACT PINS			

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SLGNL NAME	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				

产品图

PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.25	X.	±5.°
X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	xr@	制图料号 PRODUCT PART NO.	916-363A205EY10200
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	USB AF 3.0/180度11.5直脚无边铜壳LCP蓝胶24H
日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	版本 VER
					A0