


电气特性/Electrical Specification	
额定参数/Rated	300V 10A
接触电阻/Contact Resistance	20MΩ MAX
绝缘电阻/Insulation Resistance	5000MΩ/1000V
抗电强度/Dielectric Strength	2000V/1 min
机械特性/Mechanical Specification	
使用温度/Temp range	-40° C ~ +105° C
扭矩/Torque	0.8Nm
线径/Wire range	22-12AWG
瞬间温度/MAX Soldering	+250° C/5s
部件材质/Part&Material	
塑件/Housing	PA66 UL94 V-0
螺丝/Screws	钢 镀镍/Steel Ni plating
端子/Terminal	黄铜 镀锡/Brass Tin plating

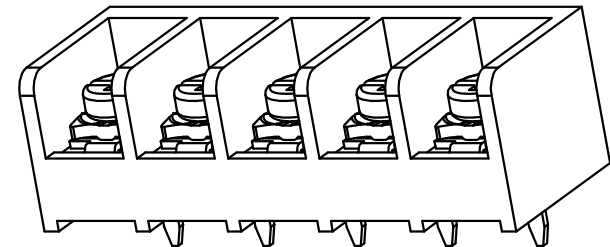

DORABO® Cixi Dibo Electronics Co.,LTD

PART NAME:				TITLE:	
PART NO:DBT50-9.5-XXP				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGEND BY	DRAWN BY	CUSTOM NO:	TOLERANCE X. ±0.50 X.X ±0.30 X.X.X ±0.1 X° ±1°
			Jack	UNITS:mm	
				SCALE	
				REVISION:	

This datasheet has been downloaded from:

datasheet.eeworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn