
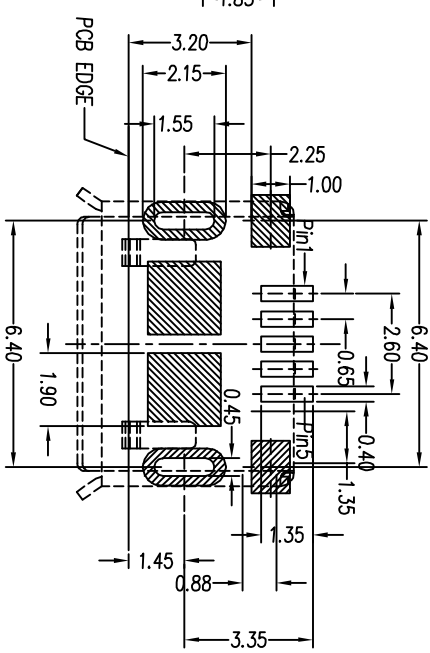
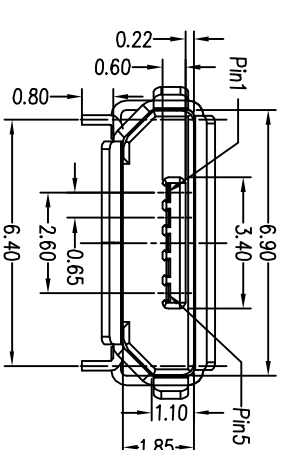

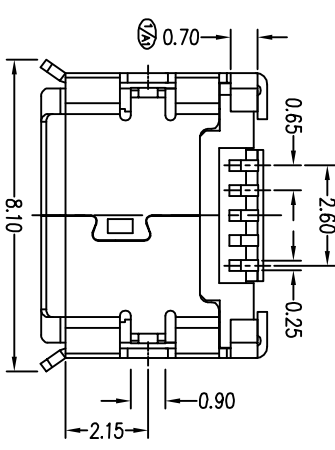

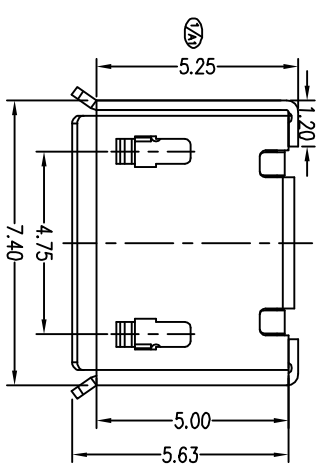



REV.	EQN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

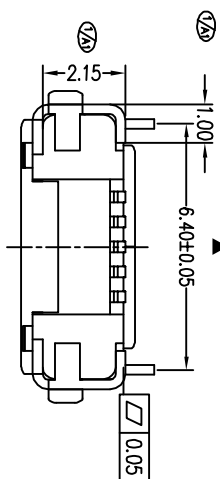

- Note:
1. Material:
    - 1.1 Housing: High temperature thermoplastic with g.f.i.U.L.94V-0
    - 1.2 Contact: copper alloy,t=0.20mm
    - 1.3 Shell: copper alloy,t=0.25mm
  2. Specification:
    - 2.1 Current rating: 1 A Max.
    - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
    - 2.3 Contact resistance: 50 mΩ Max.
    - 2.4 Insulation resistance: 100 MΩ Min.
    - 2.5 Total mating force: 3.57 Kgf Max.
    - 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
    - 2.7 Temperature range: -30°C~80°C

Order Information:  
1-MD055MXXX-01

- ①
- ②
- ③
- ④
- ⑤
- ⑥
- ⑦
- ⑧
- ⑨

- |                |           |                    |                  |
|----------------|-----------|--------------------|------------------|
| 1: Assy.       | 5: Style  | 7: Contact plating | 8: Shell plating |
| 2: Series No.  | M: Smt    | 1: 1u"             | T: Tin           |
| 3: Contact No. | 6: Color  | 2: 3u"             | N: Nickel        |
| 05: 5 pos.     | B: Black  | 3: 5u"             | A: Au plated all |
| 4: P: Plug     | W: White  | 4: 15u"            | B: None          |
| S: Socket      | N: Nature | 5: 30u"            | ...              |

No.	Nome	Q'ty	Finish
3	Shell	1	N/A
2	Contact	5	N/A
1	Housing	1	N/A

PART NO: 1-MD055MXXX-01		MATERIAL: SEE NOTE	
MODEL NO:		FINSH: SEE NOTE	
UNIT: mm	SIZE: A4	COLOR: SEE NOTE	
TOLERANCE UNSPECIFIED			
.x	±0.38	DR:	
.xx	±0.25	CHK:	
.xxx	±0.13	APP:	
ANG.	±2°		

**深圳精拓金电子有限公司**

TITLE: Micro usb 5s B Type Smt有焊脚(插板式)  
CUSTOMER DRAWING

DWG NO: A055

SCALE: 1:1

SHEET: 1/1

REV: A