
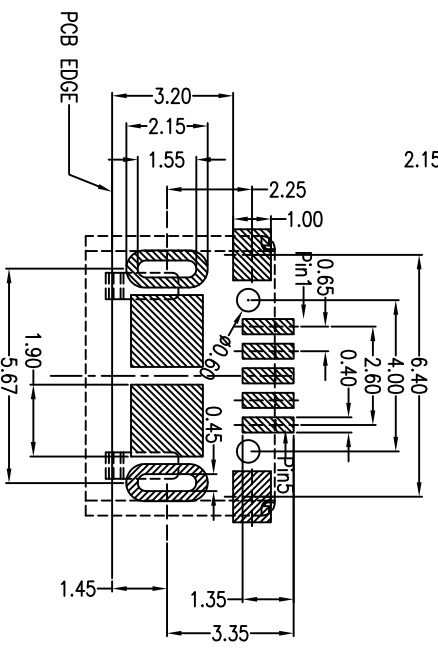
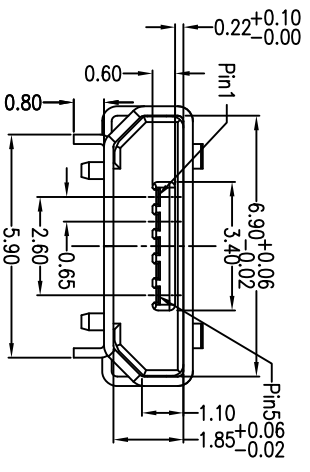

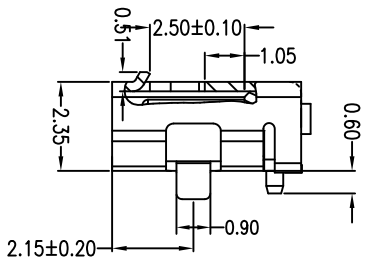
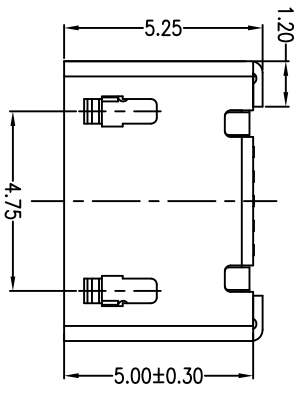



MAPX	MODIFICATION	DATE
------	--------------	------

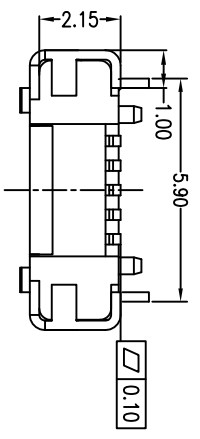

RECOMMENDED PCB LAYOUT PCB图仅供参考

- Note:
1. Material:
- 1.1 Housing: High temperature thermoplastic with g.f.Ul94v-0
 - 1.2 Contact: copper alloy,t=0.20mm
 - 1.3 Shell: copper alloy,t=0.25mm
2. Specification:
- 2.1 Current rating:1.5PIN 1.8A Max/2.3,4PIN 1A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 100 MΩ Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min.
 - 2.7 Temperature range: -30°C~80°C

深圳市精拓金电子有限公司

产品图	公差一览表
PRODUCT CHART DWG	TOLERANCE UNLESS OTHERWISE
X	±0.35
X	±0.30
XX	±0.20
XXX	±0.10

单位	MM
比例	1:1
日期	2016-09-09

制图	GAVIN
审核	郭治富
核准	黄国荣
DATE	2016-09-09
制图料号	PRODUCT PART NO
产品名称	PRODUCT NAME
角法	角法
版本	版本
AD	AD

Micro usb Ss B Type 有焊脚
插板5.9mm柱芯单位