


MAPX	MODIFICATION	DATE
------	--------------	------

SPECIFICATIONS

- 1) Electrical:
- 1.1 Contact Resistance: 30 mΩ Max
 - 1.2 Insulation Resistance: 1000MΩ Min
 - 1.3 Withstanding Voltage: 500V DC
 - 1.4 Current rating 1.5AMP Max.
 - 1.5 Total Mating Force: 3.57kg Max.
 - 1.6 Total Unmating force: 0.7kg Min.
 - 1.7 Temperature Range: -25° ~ +75°
- 2) Material:
- 2.1 Housing: High temperature Plastics UL94V-0
 - 2.2 SHELL: SPCC OR BRASS
 - 2.3 Contact: Brass
- 3) Finishing:
- 3.1 plating: Au or Sn Over 100u" Ni
 - 3.2 Crimp Terminal : Gold-plating
 - 3.2 Shell: Nickel-plating

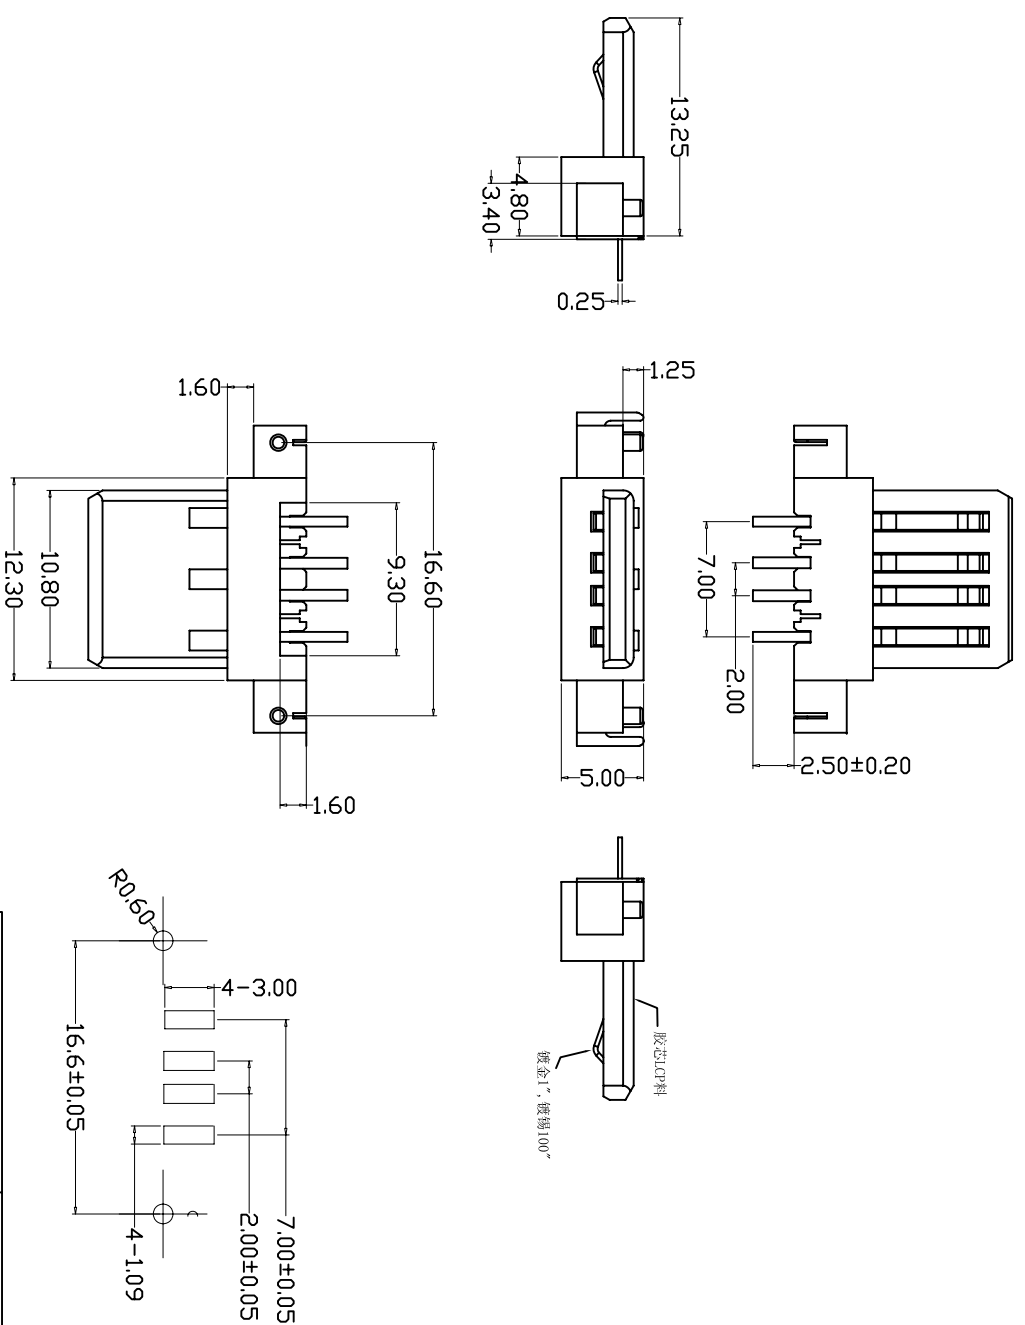

深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG 公差一览表 TOLERANCE UNLESS OTHERWISE		制图 DRAWING		制图料号 PRODUCT PART NO.	
X	±0.25	X	±5°	MM	Z-Y-B
X	±0.20	X	±2°	比例	1:1
XX	±0.15	XX	±1°	日期	2013.05.09
XXX	±0.10	XXX	±0.5°	核准	核推
		DATE		APRD	
		UNIT		VERSION	
		SCALE		角法	
		DATE		Φ	
		DATE		▽	
		DATE		R	
		DATE		S	
		DATE		T	
		DATE		U	
		DATE		V	
		DATE		W	
		DATE		X	
		DATE		Y	
		DATE		Z	
		DATE		A0	