




D款，正向10.0四脚，SMT-*6.50

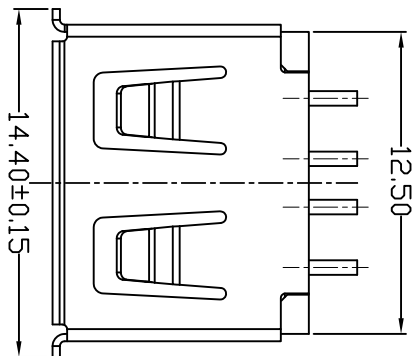


14.40±0.15

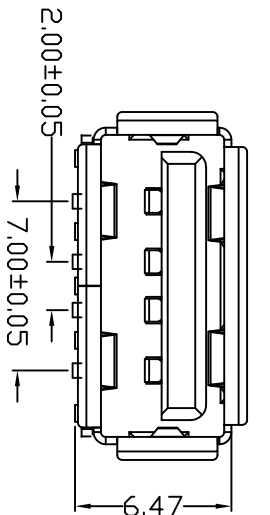

2.00±0.05
7.00±0.05

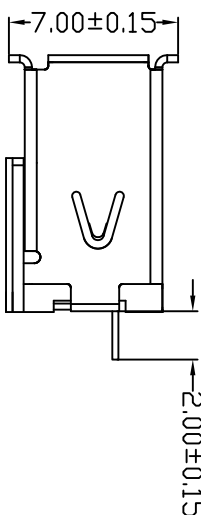

2.00±0.15

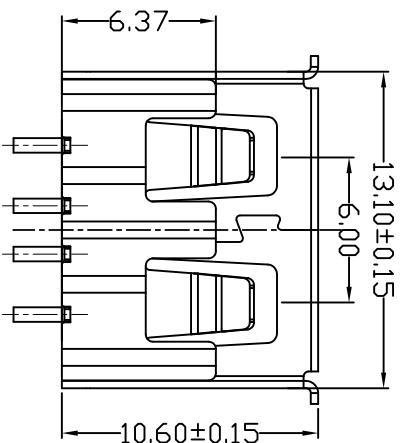

6.37
13.10±0.15
6.00
10.60±0.15

MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:
1. HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:
1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)/MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
5000 CYCLES MIN

3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55°C+85°C
4. Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

产品图

深圳市精拓金电子有限公司

公差一览表		单位	MM	制图	Z-Y-B	制料号	JTY-USB-10.6-001
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO	
X ±0.15	X ±5°	SCALE	1:1	审核		产品名称	USB A/F 10.6有边四脚鱼叉(方弹)
X ±0.10	X ±2°	DATE	20120924	核准		角法	
XX ±0.05	XX ±1°			APPD		VER	版本
XXX ±0.03	XXX ±0.5°						AD

A B C D E F G

A B C D E F G

1 2 3 4 5 6 7 8 9 10