
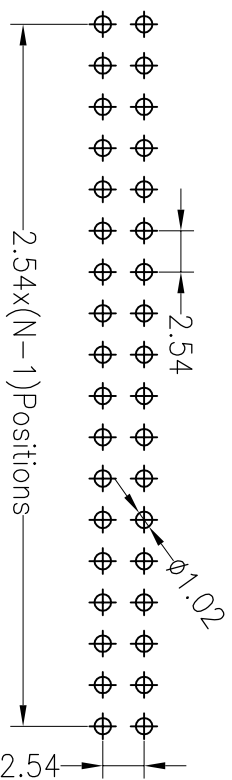
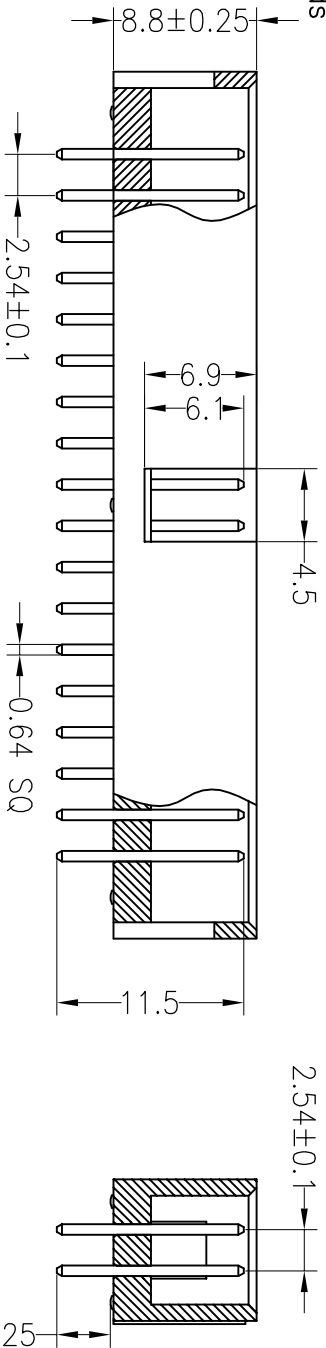


RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

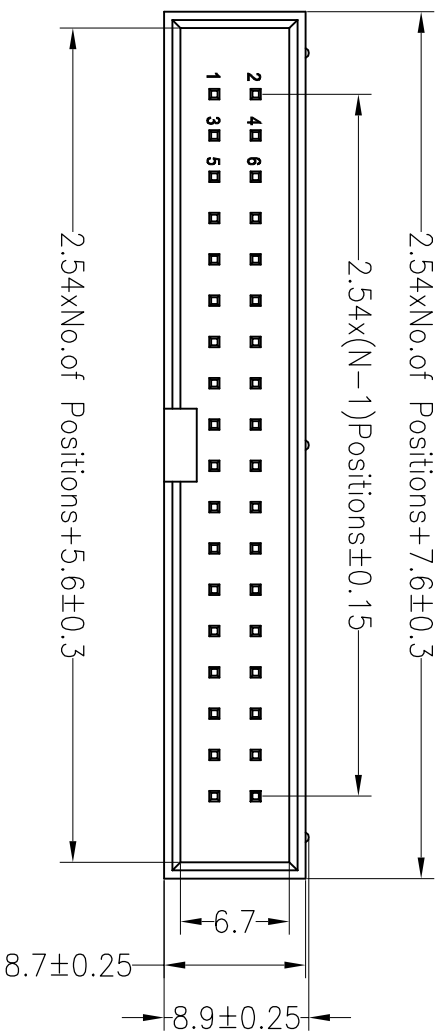

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

深圳市连盛精密连接器有限公司

OPERATION		DRAW		SCALE		FIT		PART NO.	
OPERATION	UNIT	CHECK	UNIT	UNIT	mm	UNIT	mm	SIZE	SHEET
X.X	±0.30							A4	1/1
X.XX	±0.20								
X.XXX	±0.10								
Angle	±3°								
DIM	TOL	APPROVE		PROJ.					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			
2			
3			
4			
5			
6			
7			
8			
9			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

TITLE:	PART NO.
2.54Box 32P H8.8mm 180° PBT	BH-00169