74HC1G08; 74HCT1G08

2-input AND gate
Rev. 04 — 17 July 2007

Product data sheet

General description 1.

74HC1G08 and 74HCT1G08 are high-speed, Si-gate CMOS devices. They provide a 2-input AND function.

The HC device has CMOS input switching levels and supply voltage range 2 V to 6 V.

The HCT device has TTL input switching levels and supply voltage range 4.5 V to 5.5 V.

The standard output currents are half those of the 74HC08 and 74HCT08.

2. **Features**

- Symmetrical output impedance
- High noise immunity
- Low power dissipation
- Balanced propagation delays
- SOT353-1 and SOT753 package options

Ordering information

Table 1. **Ordering information**

| Type number | Package | | | | | | | |
|-------------|-------------------|--------|---|----------|--|--|--|--|
| | Temperature range | Name | Description | Version | | | | |
| 74HC1G08GW | –40 °C to +125 °C | TSSOP5 | plastic thin shrink small outline package; 5 leads; | SOT353-1 | | | | |
| 74HCT1G08GW | | | body width 1.25 mm | | | | | |
| 74HC1G08GV | –40 °C to +125 °C | SC-74A | plastic surface-mounted package; 5 leads | SOT753 | | | | |
| 74HCT1G08GV | | | | | | | | |

Marking


Table 2. **Marking codes**

| Type number | Marking |
|-------------|---------|
| 74HC1G08GW | HE |
| 74HCT1G08GW | TE |
| 74HC1G08GV | H08 |
| 74HCT1G08GV | T08 |




5. Functional diagram



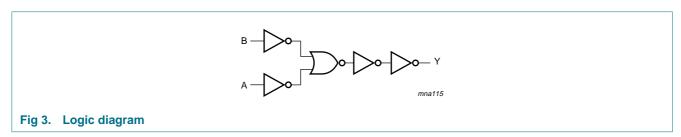

6. Pinning information

6.1 Pinning

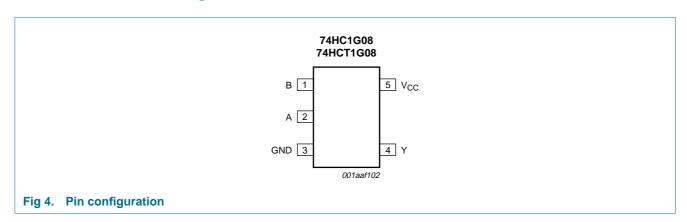

6.2 Pin description

Table 3. Pin description

| Symbol | Pin | Description |
|-----------------|-----|----------------|
| В | 1 | data input |
| A | 2 | data input |
| GND | 3 | ground (0 V) |
| Υ | 4 | data output |
| V _{CC} | 5 | supply voltage |

7. Functional description

Table 4. Function table

H = HIGH voltage level; L = LOW voltage level

| Input | Output | |
|-------|--------|---|
| Α | В | Υ |
| L | L | L |
| L | Н | L |
| Н | L | L |
| Н | Н | Н |

8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V). [1]

| Symbol | Parameter | Conditions | Min | Max | Unit |
|------------------|-------------------------|---|-------|-------|------|
| V_{CC} | supply voltage | | -0.5 | +7.0 | V |
| I _{IK} | input clamping current | $V_{I} < -0.5 \text{ V or } V_{I} > V_{CC} + 0.5 \text{ V}$ | - | ±20 | mA |
| I _{OK} | output clamping current | $V_O < -0.5 \text{ V or } V_O > V_{CC} + 0.5 \text{ V}$ | - | ±20 | mA |
| I _O | output current | $-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$ | - | ±12.5 | mA |
| I _{CC} | supply current | | - | 25 | mA |
| I_{GND} | ground current | | -25 | - | mA |
| T _{stg} | storage temperature | | -65 | +150 | °C |
| P _{tot} | total power dissipation | $T_{amb} = -40 ^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$ | [2] _ | 200 | mW |

^[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

9. Recommended operating conditions

Table 6. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V).

| Symbol | Parameter | Conditions | | 74HC1G08 | | 74HCT1G08 | | | Unit |
|---------------------|--|--------------------------|-----|----------|----------|-----------|-----|----------|------|
| | | | Min | Тур | Max | Min | Тур | Max | |
| V_{CC} | supply voltage | | 2.0 | 5.0 | 6.0 | 4.5 | 5.0 | 5.5 | V |
| VI | input voltage | | 0 | - | V_{CC} | 0 | - | V_{CC} | V |
| Vo | output voltage | | 0 | - | V_{CC} | 0 | - | V_{CC} | V |
| T _{amb} | ambient temperature | | -40 | +25 | +125 | -40 | +25 | +125 | °C |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CC} = 2.0 \text{ V}$ | - | - | 625 | - | - | - | ns/V |
| | | $V_{CC} = 4.5 \text{ V}$ | - | - | 139 | - | - | 139 | ns/V |
| | | $V_{CC} = 6.0 \text{ V}$ | - | - | 83 | - | - | - | ns/V |

^[2] Above 55 $^{\circ}\text{C}$ the value of P $_{tot}$ derates linearly with 2.5 mW/K.

10. Static characteristics

Table 7. Static characteristics

Voltages are referenced to GND (ground = 0 V). All typical values are measured at T_{amb} = 25 °C.

| Symbol | Parameter | Conditions | -40 | °C to +8 | 35 °C | -40 °C t | o +125 °C | Unit |
|--|-----------------------------|---|------|----------|-------|----------|-----------|------|
| | | | Min | Тур | Max | Min | Max | |
| For type | 74HC1G08 | | | | | | | |
| V _{IH} HIGH-level input voltage | HIGH-level input | V _{CC} = 2.0 V | 1.5 | 1.2 | - | 1.5 | - | V |
| | voltage | V _{CC} = 4.5 V | 3.15 | 2.4 | - | 3.15 | - | V |
| | | V _{CC} = 6.0 V | 4.2 | 3.2 | - | 4.2 | - | V |
| V _{IL} | LOW-level input | V _{CC} = 2.0 V | - | 0.8 | 0.5 | - | 0.5 | V |
| | voltage | V _{CC} = 4.5 V | - | 2.1 | 1.35 | - | 1.35 | V |
| | | V _{CC} = 6.0 V | - | 2.8 | 1.8 | - | 1.8 | V |
| V _{OH} | HIGH-level output | $V_I = V_{IH}$ or V_{IL} | | | | | | |
| | voltage | $I_{O} = -20 \mu A; V_{CC} = 2.0 V$ | 1.9 | 2.0 | - | 1.9 | - | V |
| | | $I_{O} = -20 \mu A; V_{CC} = 4.5 V$ | 4.4 | 4.5 | - | 4.4 | - | V |
| | | $I_O = -20 \mu A$; $V_{CC} = 6.0 \text{ V}$ | 5.9 | 6.0 | - | 5.9 | - | V |
| | | $I_{O} = -2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$ | 4.13 | 4.32 | - | 3.7 | - | V |
| | | $I_{O} = -2.6 \text{ mA}; V_{CC} = 6.0 \text{ V}$ | 5.63 | 5.81 | - | 5.2 | - | V |
| V _{OL} | LOW-level output voltage | $V_I = V_{IH}$ or V_{IL} | | | | | | |
| | | $I_O = 20 \mu A$; $V_{CC} = 2.0 \text{ V}$ | - | 0 | 0.1 | - | 0.1 | V |
| | | $I_O = 20 \mu A$; $V_{CC} = 4.5 \text{ V}$ | - | 0 | 0.1 | - | 0.1 | V |
| | | $I_O = 20 \mu A$; $V_{CC} = 6.0 \text{ V}$ | - | 0 | 0.1 | - | 0.1 | V |
| | | $I_O = 2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$ | - | 0.15 | 0.33 | - | 0.4 | V |
| | | $I_{O} = 2.6 \text{ mA}; V_{CC} = 6.0 \text{ V}$ | - | 0.16 | 0.33 | - | 0.4 | V |
| I _I | input leakage current | $V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$ | - | - | 1.0 | - | 1.0 | μΑ |
| I _{CC} | supply current | $V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0 \text{ V}$ | - | - | 10 | - | 20 | μΑ |
| Cı | input capacitance | | - | 1.5 | - | - | - | рF |
| For type | 74HCT1G08 | | | | | | | |
| V_{IH} | HIGH-level input voltage | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$ | 2.0 | 1.6 | - | 2.0 | - | V |
| V_{IL} | LOW-level input voltage | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$ | - | 1.2 | 0.8 | - | 0.8 | V |
| V _{OH} | HIGH-level output | $V_I = V_{IH}$ or V_{IL} | | | | | | |
| | voltage | $I_{O} = -20 \mu A$; $V_{CC} = 4.5 \text{ V}$ | 4.4 | 4.5 | - | 4.4 | - | V |
| | | $I_{O} = -2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$ | 4.13 | 4.32 | - | 3.7 | - | V |
| V _{OL} | LOW-level output | $V_I = V_{IH}$ or V_{IL} | | | | | | |
| | voltage | $I_O = 20 \mu A$; $V_{CC} = 4.5 \text{ V}$ | - | 0 | 0.1 | - | 0.1 | V |
| | | $I_{O} = 2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$ | - | 0.15 | 0.33 | - | 0.4 | V |
| l _l | input leakage current | $V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$ | - | - | 1.0 | - | 1.0 | μΑ |

Table 7. Static characteristics ... continued

Voltages are referenced to GND (ground = 0 V). All typical values are measured at T_{amb} = 25 °C.

| Symbol | Parameter | Conditions | -40 °C to +85 °C | | | –40 °C t | Unit | |
|-----------------|---------------------------|---|------------------|-----|-----|----------|------|----|
| | | | Min | Тур | Max | Min | Max | |
| I _{CC} | supply current | $V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$ | - | - | 10 | - | 20 | μΑ |
| ΔI_{CC} | additional supply current | per input; V_{CC} = 4.5 V to 5.5 V; V_I = V_{CC} - 2.1 V; I_O = 0 A | - | - | 500 | - | 850 | μΑ |
| Cı | input capacitance | | - | 1.5 | - | - | - | pF |

11. Dynamic characteristics

Table 8. Dynamic characteristics

GND = 0 V; $t_r = t_f \le 6.0$ ns; All typical values are measured at $T_{amb} = 25$ °C. For test circuit see Figure 6

| Symbol | Parameter | Conditions | | -40 °C to +85 °C | | 5 °C | -40 °C t | o +125 °C | Unit |
|-----------------|-------------------------------|--|-----|------------------|-----|------|----------|-----------|------|
| | | | | Min | Тур | Max | Min | Max | |
| For type | 74HC1G08 | ' | | | | | ' | ' | |
| t _{pd} | propagation delay | A and B to Y; see Figure 5 | [1] | | | | | | |
| | | $V_{CC} = 2.0 \text{ V}; C_L = 50 \text{ pF}$ | | - | 25 | 115 | - | 135 | ns |
| | | $V_{CC} = 4.5 \text{ V}; C_L = 50 \text{ pF}$ | | - | 9 | 23 | - | 27 | ns |
| | | $V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$ | | - | 7 | - | - | - | ns |
| | | $V_{CC} = 6.0 \text{ V}; C_L = 50 \text{ pF}$ | | - | 8 | 20 | - | 23 | ns |
| C_{PD} | power dissipation capacitance | $V_I = GND \text{ to } V_{CC}$ | [2] | - | 19 | - | - | - | pF |
| For type | 74HCT1G08 | | | | | | | | |
| t _{pd} | propagation delay | A and B to Y; see Figure 5 | [1] | | | | | | |
| | | $V_{CC} = 4.5 \text{ V}; C_L = 50 \text{ pF}$ | | - | 11 | 23 | - | 27 | ns |
| | | $V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$ | | - | 11 | - | - | - | ns |
| C_{PD} | power dissipation capacitance | $V_I = GND \text{ to } V_{CC} - 1.5 \text{ V}$ | [2] | - | 21 | - | - | - | pF |

^[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o)$ where:

 f_i = input frequency in MHz

f_o = output frequency in MHz


C_L = output load capacitance in pF

V_{CC} = supply voltage in Volts

 $\sum (C_L \times V_{CC}^2 \times f_o) = \text{sum of outputs}$


^[2] C_{PD} is used to determine the dynamic power dissipation P_D (μW).

12. Waveforms

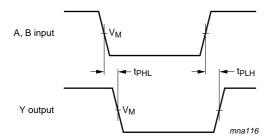

For 74HC1G08: V_M = 0.5 × V_{CC} ; V_I = GND to V_{CC} For 74HC11G08: V_M = 1.3 V; V_I = GND to 3.0 V

Fig 5. The input (A and B) to output (Y) propagation delays

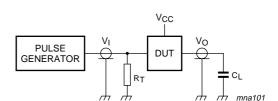

Test data is given in <u>Table 8</u>. Definitions for test circuit:

 C_L = Load capacitance including jig and probe capacitance

 $R_T = \mbox{Termination resistance}$ should be equal to the output impedance Z_o of the pulse generator


Fig 6. Load circuitry for switching times

13. Package outline

TSSOP5: plastic thin shrink small outline package; 5 leads; body width 1.25 mm

SOT353-1

© Nexperia B.V. 2017. All rights reserved

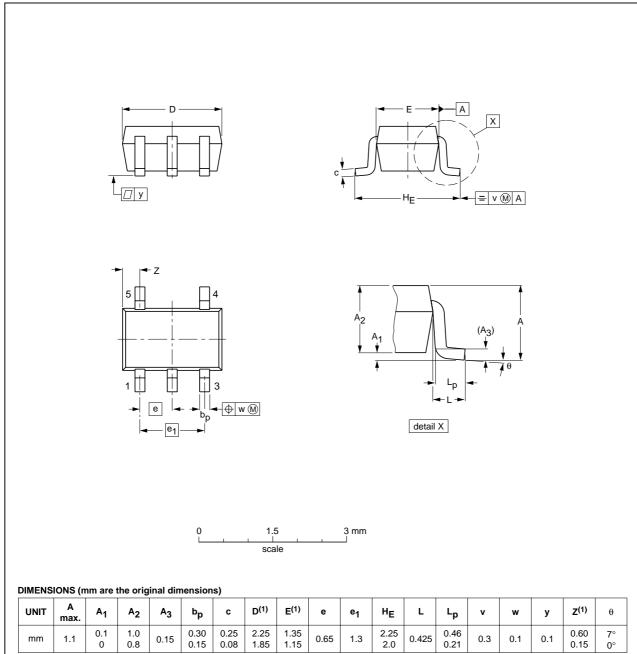

Note

74HC_HCT1G08_4

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

| OUTLINE | | REFERENCES | | | EUROPEAN | ISSUE DATE |
|----------|-----|------------|--------|--|------------|---------------------------------|
| VERSION | IEC | JEDEC | JEITA | | PROJECTION | ISSUE DATE |
| SOT353-1 | | MO-203 | SC-88A | | | 00-09-01 03-02-19 |

Fig 7. Package outline SOT353-1 (TSSOP5)

Plastic surface-mounted package; 5 leads

SOT753

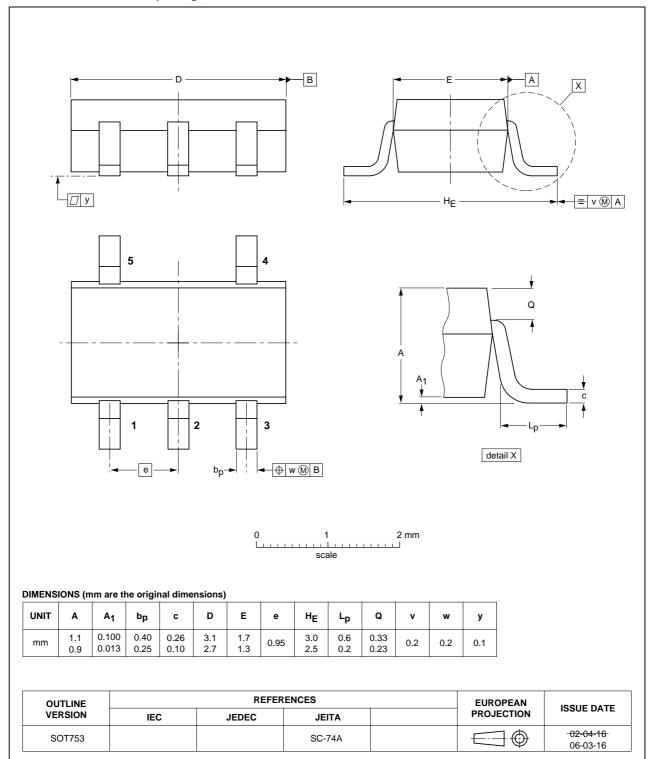


Fig 8. Package outline SOT753 (SC-74A)

14. Abbreviations

Table 9. Abbreviations

| Acronym | Description |
|---------|-----------------------------|
| DUT | Device Under Test |
| TTL | Transistor-Transistor Logic |

15. Revision history

Table 10. Revision history

| Document ID | Release date | Data sheet status | Change notice | Supersedes | | | | | |
|----------------|---|--|-----------------------|----------------|--|--|--|--|--|
| 74HC_HCT1G08_4 | 20070717 | Product data sheet | - | 74HC_HCT1G08_3 | | | | | |
| Modifications: | The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors. | | | | | | | | |
| | Legal texts | Legal texts have been adapted to the new company name where appropriate. | | | | | | | |
| | Package S | OT353 changed to SOT353-1 | in Table 1 and Figure | <u>· 7</u> . | | | | | |
| | Quick Refe | erence Data and Soldering sec | tions removed. | | | | | | |
| | Section 2 ' | <u>'Features"</u> updated. | | | | | | | |
| 74HC_HCT1G08_3 | 20020517 | Product specification | - | 74HC_HCT1G08_2 | | | | | |
| 74HC_HCT1G08_2 | 20010302 | Product specification | - | 74HC_HCT1G08_1 | | | | | |
| 74HC_HCT1G08_1 | 19981110 | Preliminary specification | - | - | | | | | |
| | | | | | | | | | |

16. Legal information

16.1 Data sheet status

| Document status[1][2] | Product status[3] | Definition |
|--------------------------------|-------------------|---|
| Objective [short] data sheet | Development | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification | This document contains data from the preliminary specification. |
| Product [short] data sheet | Production | This document contains the product specification. |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

16.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

16.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia accepts no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by Nexperia. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

17. Contact information

For additional information, please visit: http://www.nexperia.com

For sales office addresses, send an email to: salesaddresses@nexperia.com

18. Contents

| 1 | General description | 1 |
|------|----------------------------------|---|
| 2 | Features | 1 |
| 3 | Ordering information | 1 |
| 4 | Marking | |
| 5 | Functional diagram | 2 |
| 6 | Pinning information | 2 |
| 6.1 | Pinning | 2 |
| 6.2 | Pin description | 2 |
| 7 | Functional description | 3 |
| 8 | Limiting values | 3 |
| 9 | Recommended operating conditions | 3 |
| 10 | Static characteristics | 4 |
| 11 | Dynamic characteristics | Ę |
| 12 | Waveforms | 6 |
| 13 | Package outline | 7 |
| 14 | Abbreviations | |
| 15 | Revision history | ç |
| 16 | Legal information 1 | (|
| 16.1 | Data sheet status | (|
| 16.2 | Definitions1 | (|
| 16.3 | Disclaimers | |
| 16.4 | Trademarks1 | |
| 17 | Contact information 1 | (|
| 12 | Contents | 1 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NXP:

74HC1G08GW-R 74HCT1G08GV 74HCT1G08GW-R 74HC1G08GW-Q125