


# DATASHEET

# SMD • B 19-22/R6GHC-A32/2T



### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

### Description

- The 19-22 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### **Applications**

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

### **Device Selection Guide**

Code	Chip Materials	Emitted Color	Resin Color
R6	AlGaInP	Brilliant Red	Water Clear
GH	InGaN	Brilliant Green	<ul> <li>Water Clear</li> </ul>

### Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Code	Rating	Unit	
Reverse Voltage	V <sub>R</sub>		5	V	
E		R6	25		
Forward Current	l <sub>F</sub>	GH	25	mA	
Peak Forward Current		R6	60		
(Duty 1/10 @1KHz)	I <sub>FP</sub>	GH	100	—— mA	
Power Dissipation	Pd	R6	60	mW	
Power Dissipation		GH	95	IIIVV	
	ESD <sub>HBM</sub>	R6	2000		
Electrostatic Discharge		GH	150	— V	
Operating Temperature	T <sub>opr</sub>		-40 ~ +85	°C	
Storage Temperature	Tstg		-40 ~ +90	°C	
Soldering Temperature	Tsol		Reflow Soldering : 260 $^\circ\!\!\mathbb{C}$ for 10 sec. Hand Soldering : 350 $^\circ\!\!\mathbb{C}$ for 3 sec.		

### Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Code	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	R6	112		225	- mcd	
		GH	180		360		
Viewing Angle	<b>2θ</b> <sub>1/2</sub>			130		deg	_
Peak Wavelength	) n	R6		632		– nm	_ I <sub>F</sub> =20mA _
	λр	GH		518			
Dominant Wavelength	λd	R6		624		– nm	
		GH	520.0		535.0		
Spectrum Radiation Bandwidth	$ riangle \lambda$	R6		20		– nm	
		GH		35			
Forward Voltage	V <sub>F</sub>	R6	1.70	2.00	2.40	– V	
		GH	2.70	3.30	3.70		
Reverse Current	I <sub>R</sub>	R6			10	– μΑ	V <sub>R</sub> =5V
		GH			50		v R <b>-</b> J v

Note:

1.Tolerance of Luminous Intensity: ±11%

2.Tolerance of Dominant Wavelength ±1nm

### R6 Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
R1	112	140		
R2	140	180	mcd	I <sub>F</sub> =20mA
<b>S</b> 1	180	225		

#### GH Bin Bange

## Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
<b>S</b> 1	180	225		
S2	225	285	mcd	I <sub>F</sub> =20mA
T1	285	360		

## Bin Range of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
Х	520	525		
Y	525	530	nm	I <sub>F</sub> =20mA
Z	530	535		

Note:


1.Tolerance of Luminous Intensity: ±11%

2. Tolerance of Dominant Wavelength ±1nm


90°


0.6

# Typical Electro-Optical Characteristics Curves R6

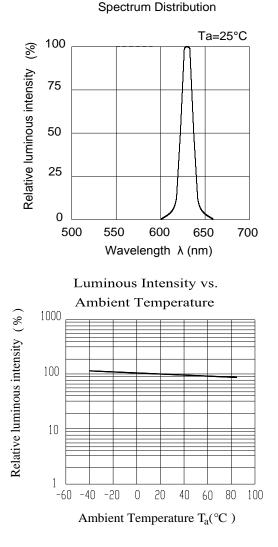

Forward Current Derating Curve



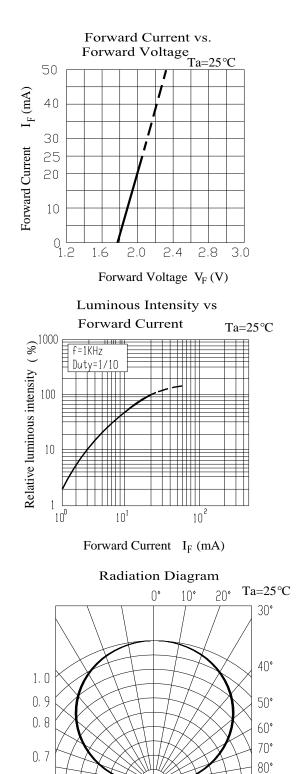

0. 3


0.5


0.1

0. 2

0.4

### **Typical Electro-Optical Characteristics Curves** GH

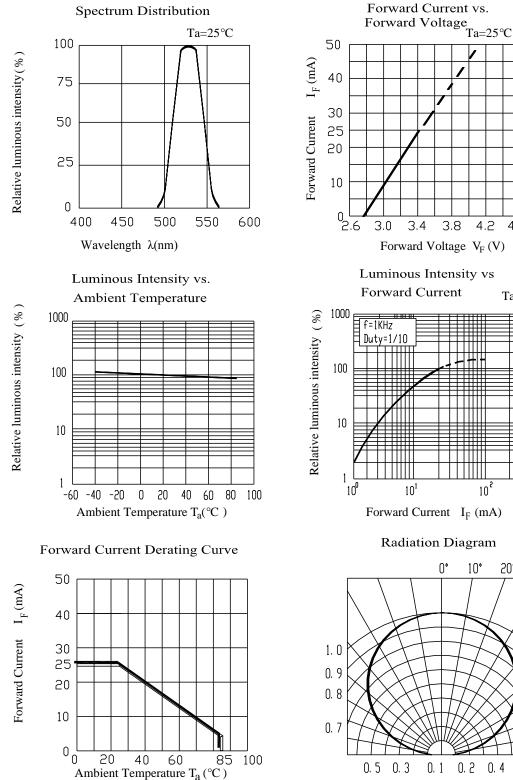

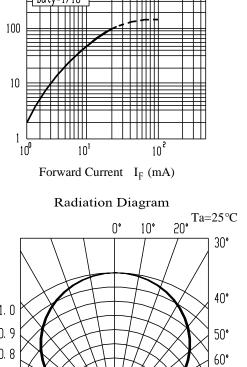

0. 2

0.4

0. 1

0.3

3.0

3.4

3.8

Forward Voltage V<sub>F</sub>(V)

4.2

4.5

Ta=25°C


70°

80°

90°

0.6

### **Package Dimension**

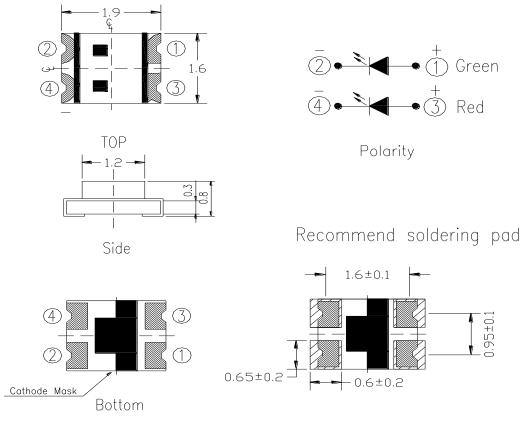


Suggested pad dimension is just for reference only. Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm



### Label Explanation




### **Reel Dimensions**

2.0±0.5 2.0±0.5 Ø13.0±0.2 Ø13.0±0.2 Ø13.0±0.2 Ø13.0±0.2

Note: The tolerances unless mentioned is  $\pm 0.1$ mm ,Unit = mm

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- · LOT No: Lot Number




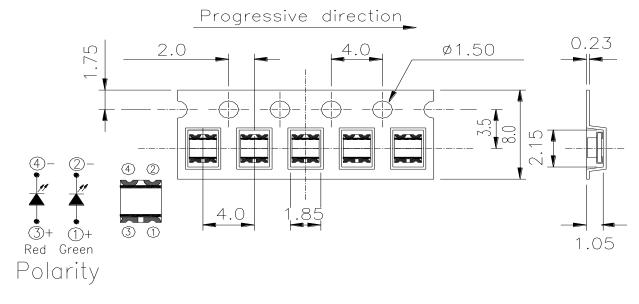

## Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

Note: The tolerances unless mentioned is  $\pm 0.1$ mm ,Unit = mm

### **Moisture Resistant Packaging**

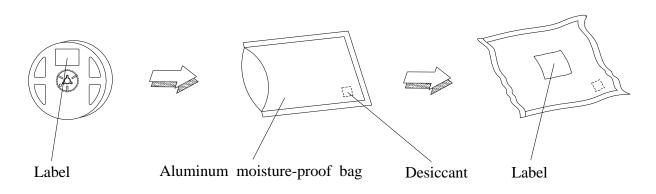

### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

2. Storage


2.1 Do not open moisture proof bag before the products are ready to use.

- 2.2 After opening the package: The LEDs should be kept at  $30^\circ$ C or less and 60%RH or less.
- 2.3 The LEDs should be used within 168 hours (7days) after opening the package .
  - If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

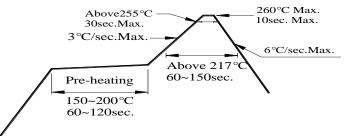

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





### **Application Restrictions**

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.