


DATASHEET

SMD • B 19-21CUTD/S3484/TR8(GREE)



Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

- The 19-21C SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- · Backlighting in dashboard and switch
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- · General use.



Device Selection Guide

Chip Materials	Emitted Color	Resin Color
InGaN	Pure White	Yellow Diffused

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	10	V	
DC forward current per chip	I _F	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	100	mA	
Power Dissipation	Pd	95	mW	
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}\! C$	
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\!\mathrm{C}$	
Electrostatic Discharge	ESD _{HBM}	2000	V	
Soldering Temperature	T _{sol}	Reflow Soldering : 260 $^{\circ}\mathbb{C}$ for 10 sec. Hand Soldering : 350 $^{\circ}\mathbb{C}$ for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	400		550	mcd	
Viewing Angle	$2\theta_{1/2}$		110		deg	I _F =20mA
Forward Voltage	V _F	2.60		3.60	V	
Reverse Current	I _R			10	μΑ	V _R =5V

Note

^{1.} Tolerance of Luminous Intensity: ±11

^{2.} Tolerance of Forward Voltage: ±0.05V



Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
1	400	450		
2	450	500	mcd	$I_F = 20 \text{mA}$
3	500	550		

Notes:

Tolerance of Luminous Intensity ±11%

Bin Range Of Luminous Voltage

Bin Code	Min.	Max.	Unit	Condition
28	2.60	2.70		
29	2.70	2.80		
30	2.80	2.90		
31	2.90	3.00		
32	3.00	3.10	V	I _F =20mA
33	3.10	3.20	v	IF –ZUITA
34	3.20	3.30		
35	3.30	3.40		
36	3.40	3.50		
37	3.50	3.60		

Note:

Tolerance of Forward Voltage ±0.05V



Chromaticity Coordinates Specifications for Bin Grading


Bin Code	CIE_x	CIE_y	Condition
	0.230	0.181	
1	0.215	0.181	_
ı	0.225	0.198	_
	0.240	0.198	
	0.240	0.198	_
2	0.225	0.198	_
2	0.232	0.211	_
	0.247	0.211	_
	0.247	0.211	_
3	0.232	0.211	
3	0.239	0.224	- I _F =20mA
	0.254	0.224	
	0.254	0.224	
1	0.239	0.224	_
4	0.243	0.231	_
	0.258	0.231	_
	0.258	0.231	_
4-2	0.243	0.231	_
4-2	0.247	0.238	_
	0.262	0.238	_

Note:

The C.I.E 1931 chromaticity diagram(Tolerance ±0.01)
The products are sensitive to static electricity and care must be fully taken when handling products.




CIE Chromaticity Diagram

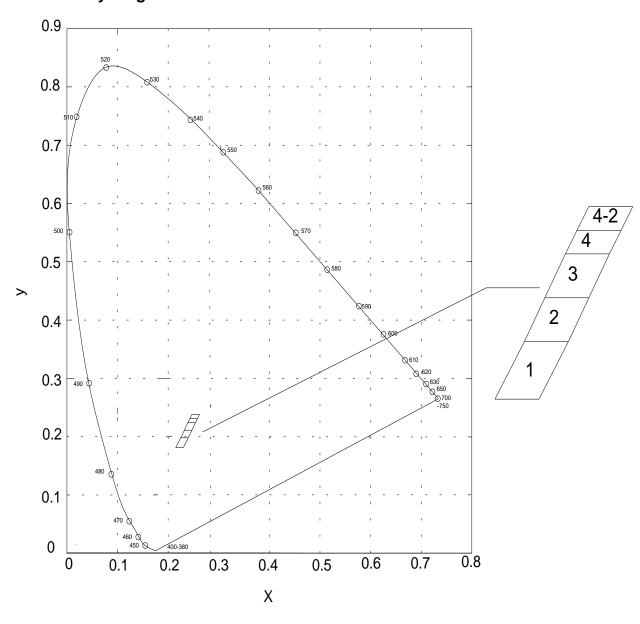




Typical Electro-Optical Characteristics Curves





 $Wave length \ \lambda p(nm) \\ Relative Luminous Intensity vs.$




Forward Current Derating Curve

Ambient Temperature Ta (°C)






Relative Luminous Intensity vs



Radiation Diagram Ta=25° 0° 10° 20° 30° 40° 1.0 6.0 50° 0.8 60° 70° 80° 90° 0.5 0.3 0.1 0.2 0.4 0.6

Package Outline Dimensions

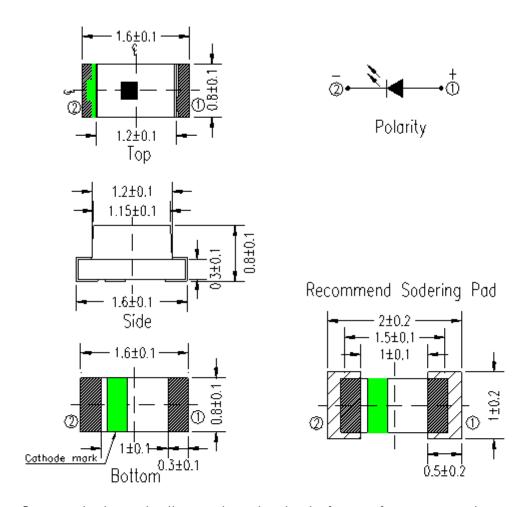


Suggested pad dimension is just for reference only. Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm




Moisture Resistant Packing Materials Label Explanation




- · CPN: Customer's Product Number
- P/N: Product Number
- · QTY: Packing Quantity
- · CAT: Luminous Intensity Rank
- · HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- · REF: Forward Voltage Rank
- · LOT No: Lot Number

Reel Dimensions

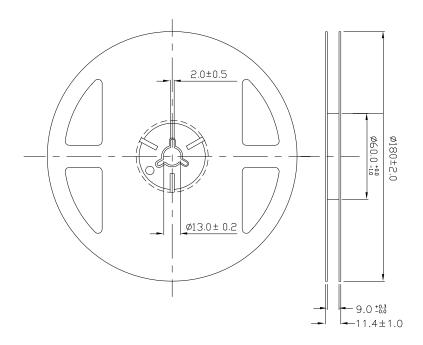




Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

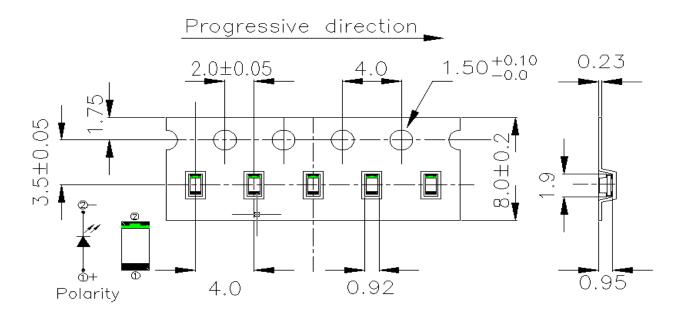

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

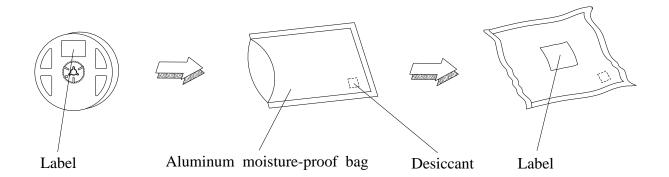



Precautions For Use

1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 After opening the package: The LEDs should be kept at 30°℃ or less and 60%RH or less.
- 2.3 The LEDs should be used within 168 hours (7days) after opening the package . If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5℃ for 24 hours..

3. Soldering Condition

3.1 Pb-free solder temperature profile

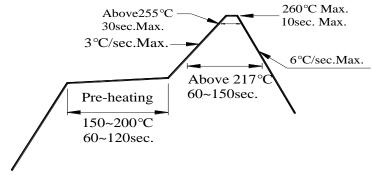


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.