


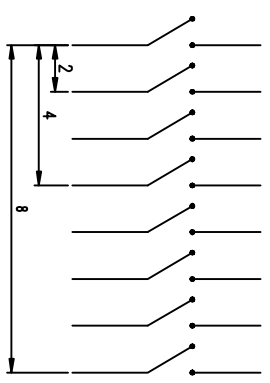

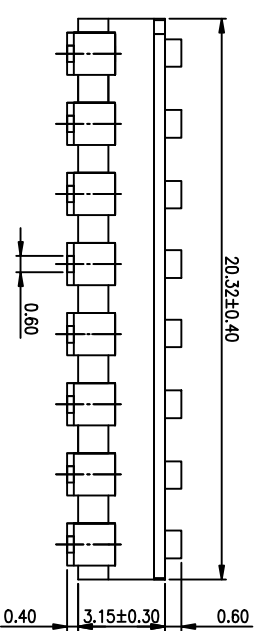

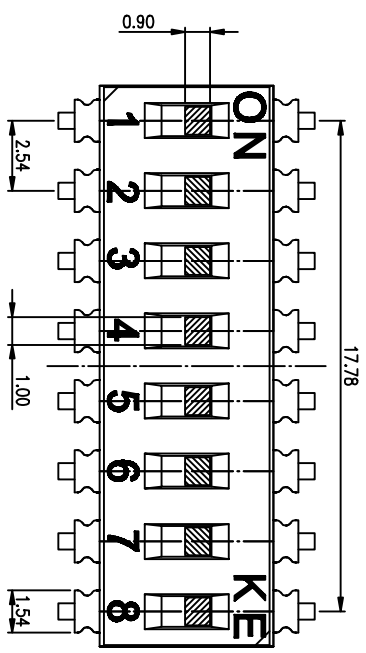


| | |
|--------------|----------------|
| PRODUCT NO. | 1 |
| DISCOBLSGSET | RoHS compliant |

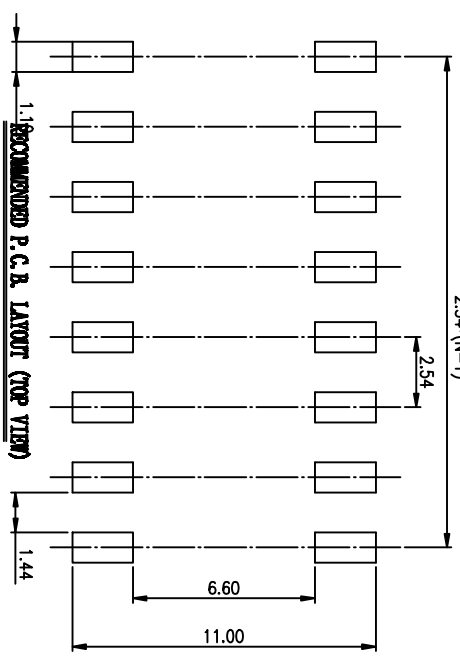

- NOTES :
- 1> Operation:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles minimum
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

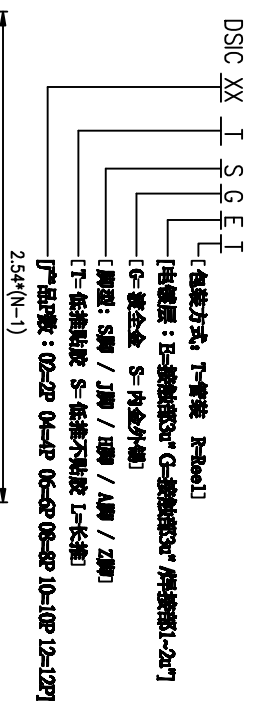

| Number | Part Name | Material | Finished |
|--------|------------------|--------------|----------|
| ① | Actuator | UL94 V0 | White |
| ② | Cover | UL94 V0 | Black |
| ③ | Movable | Copper Alloy | 3u"Gold |
| ④ | Terminal | Brass | 1u"Gold |
| ⑤ | Base | UL94 V0 | Black |
| ⑥ | Terminal Contact | Brass | 3u"Gold |

| TOLERANCE UNLESS OTHERWISE SPECIFIED | | INSPECTION COPY | |
|--------------------------------------|------------|-----------------|------|
| LINER | ANGLES | PROJECTION | COPY |
| 0 ± 0.25 | 0 ± 2° | | |
| .00 ± 0.15 | .0 ± 1° | | |
| .000 ± 0.10 | .00 ± 0.5° | | |
| DESIGN | kathy | 2012/04/12 | |
| DRAWING | | | |
| CHECK | | | |
| APPRO. | | | |

RE 东莞市广誉实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

TITLE
BY DISC SERIES PITCH 2.54mm
PRODUCT FAMILY DISC SERIES
PRAT NO. DISCOBLSGSET
FILE NO. DISCOBLSGSET-A
SIZE UNIT SCALE SHEET REV.
A4 mm 2 : 1 1 OF 1 A