




(XHB/TJC26)型条形连接器

(XHB/TJC26) Pressure Welding Bar Connector

间距 (Pitch) : 2.5mm (.098")

技术参数 SPECIFICATIONS


- 线数 (Poles) : 2~16
- 适用线规 (Applicable wires) : AWG28#~22#
- 适应基板厚度 (Applicable PC board thickness) : 1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1000V.Ac/1min
- 材料 (Material) :
 - 孔座 (Housing) : 尼龙 (Nylon) UL94V-2(0)
 - 针座 (Wafer) : 尼龙 (Nylon) UL94V-2(0)
 - 插片 (Retainer) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

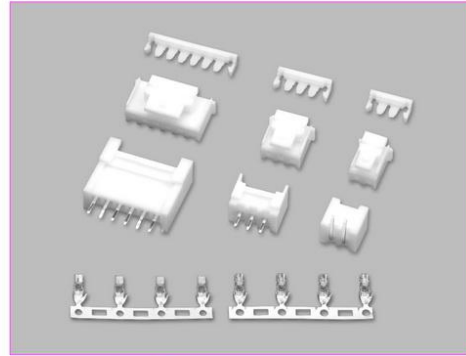


端子 TERMINAL (XH/TJC3)

型号 Type	适用线规 Applicable wires mm ²	AWG#	电线外径 O.D of wire ins mm	数量 Quantity
HX25002-PT	0.08~0.33	28~22	1.0~1.8	6000PCS/盘
HX25002-PTA	0.08~0.33	28~22	1.0~1.8	6000PCS/盘


HX25002-PT (XH/TJC3)




HX25002-PTA (XH/TJC3)




HX25036-Y (XHB)




HX25002-PS (XH)




HX25037-A (XHB)




HX25037-WAP (XHB)



HX25037-BH (XHB)



安装尺寸 MOUNTING MEASUREMENT



孔座 HOUSING (XHB)

线数 Poles	型号 Type	尺寸 Dimensions (mm)	A	B	C
2	HX25036-2Y HX25002-2PS	2.5 5.8 8.9	2.5	5.8	8.9
3	HX25036-3Y HX25002-3PS	5.0 8.3 11.4	5.0	8.3	11.4
4	HX25036-4Y HX25002-4PS	7.5 10.8 13.9	7.5	10.8	13.9
5	HX25036-5Y HX25002-5PS	10.0 13.3 16.4	10.0	13.3	16.4
6	HX25036-6Y HX25002-6PS	12.5 15.8 18.9	12.5	15.8	18.9
7	HX25036-7Y HX25002-7PS	15.0 18.3 21.4	15.0	18.3	21.4
8	HX25036-8Y HX25002-8PS	17.5 20.8 23.9	17.5	20.8	23.9
9	HX25036-9Y HX25002-9PS	20.0 23.3 26.4	20.0	23.3	26.4
10	HX25036-10Y HX25002-10PS	22.5 25.8 28.9	22.5	25.8	28.9
11	HX25036-11Y HX25002-11PS	25.0 28.3 31.4	25.0	28.3	31.4
12	HX25036-12Y HX25002-12PS	27.5 30.8 33.9	27.5	30.8	33.9
13	HX25036-13Y HX25002-13PS	30.0 33.3 36.4	30.0	33.3	36.4
14	HX25036-14Y HX25002-14PS	32.5 35.8 38.9	32.5	35.8	38.9
15	HX25036-15Y HX25002-15PS	35.0 38.3 41.4	35.0	38.3	41.4
16	HX25036-16Y HX25002-16PS	37.5 40.8 43.9	37.5	40.8	43.9

针座 WAFER (XHB)

线数 Poles	型号 Type	尺寸 Dimensions (mm)	A	B
2	HX25037-2AWA HX25037-2BH	2.5 7.5	2.5	7.5
3	HX25037-3AWA HX25037-3BH	5.0 10.0	5.0	10.0
4	HX25037-4AWA HX25037-4BH	7.5 12.5	7.5	12.5
5	HX25037-5AWA HX25037-5BH	10.0 15.0	10.0	15.0
6	HX25037-6AWA HX25037-6BH	12.5 17.5	12.5	17.5
7	HX25037-7AWA HX25037-7BH	15.0 20.0	15.0	20.0
8	HX25037-8AWA HX25037-8BH	17.5 22.5	17.5	22.5
9	HX25037-9AWA HX25037-9BH	20.0 25.0	20.0	25.0
10	HX25037-10AWA HX25037-10BH	22.5 27.5	22.5	27.5
11	HX25037-11AWA HX25037-11BH	25.0 30.0	25.0	30.0
12	HX25037-12AWA HX25037-12BH	27.5 32.5	27.5	32.5
13	HX25037-13AWA HX25037-13BH	30.0 35.0	30.0	35.0
14	HX25037-14AWA HX25037-14BH	32.5 37.5	32.5	37.5
15	HX25037-15AWA HX25037-15BH	35.0 40.0	35.0	40.0
16	HX25037-16AWA HX25037-16BH	37.5 42.5	37.5	42.5